

HSF

NOTES:



Rated Current:1.0AMP
 Rated Voltage:100V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to +85°C

Contact Material:Brass
 Contact plating:Sn Over Ni
 Insulator Material:High Temperature Plastic UL94V-0

Ordering Information

WF1502 - WM XX XX 1

No. of pins
 02P-20P
 Color
 E=Beige
 W=White
 Packing
 T=Tube
 P=Tube+CAP
 R= Tape&Reel+CAP

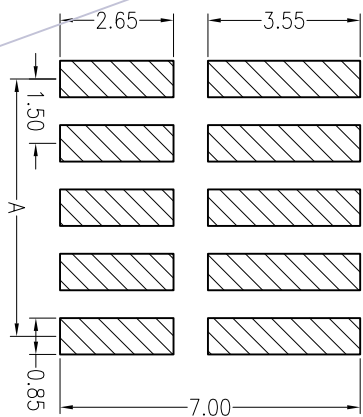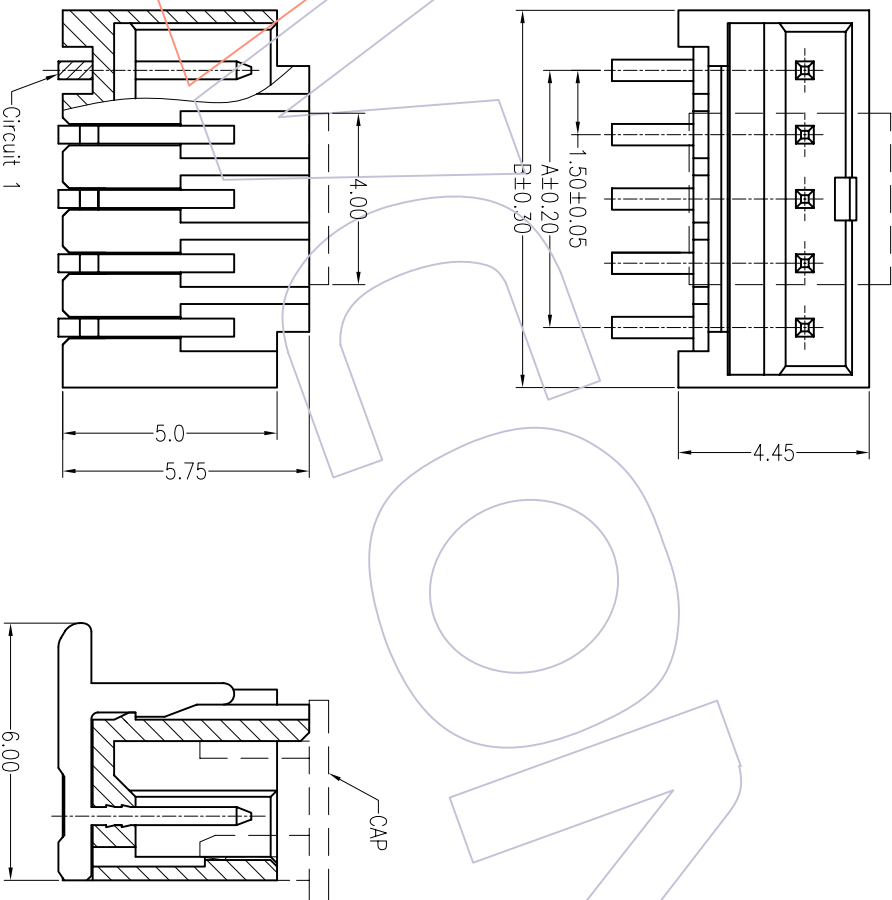

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

| Circuit | Part No. | Dimension | | Qty /Reel |
|---------|----------------|-----------|------|-----------|
| | | A | B | |
| 02 | WF1502-WM02XX1 | 1.5 | 4.3 | 800 |
| 03 | WF1502-WM03XX1 | 3.0 | 5.8 | 800 |
| 04 | WF1502-WM04XX1 | 4.5 | 7.3 | 800 |
| 05 | WF1502-WM05XX1 | 6.0 | 8.8 | 800 |
| 06 | WF1502-WM06XX1 | 7.5 | 10.3 | 800 |
| 07 | WF1502-WM07XX1 | 9.0 | 11.8 | 800 |
| 08 | WF1502-WM08XX1 | 10.5 | 13.3 | 800 |
| 09 | WF1502-WM09XX1 | 12.0 | 14.8 | 800 |
| 10 | WF1502-WM10XX1 | 13.5 | 16.3 | 800 |
| 11 | WF1502-WM11XX1 | 15.0 | 17.8 | 800 |
| 12 | WF1502-WM12XX1 | 16.5 | 19.3 | 800 |
| 13 | WF1502-WM13XX1 | 18.0 | 20.8 | 800 |
| 14 | WF1502-WM14XX1 | 19.5 | 22.3 | 800 |
| 15 | WF1502-WM15XX1 | 21.0 | 23.8 | 800 |
| 16 | WF1502-WM16XX1 | 22.5 | 25.3 | 800 |
| 17 | WF1502-WM17XX1 | 24.0 | 26.8 | 800 |
| 18 | WF1502-WM18XX1 | 25.5 | 28.3 | 800 |
| 19 | WF1502-WM19XX1 | 27.0 | 29.8 | 800 |
| 20 | WF1502-WM20XX1 | 28.5 | 31.3 | 800 |

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: 1.50 WAFER 180° SMT

| OPERATION | DRAW | WEIXD | SCALE |
|-----------|---------|----------|-------|
| X.X | DESIGN | 08/07/30 | 1:1 |
| X.XX | CHECK | | mm |
| X.XXX | CHECK | | A4 |
| Angle | APPROVE | | 1/1 |
| ± 3' | | | PROU. |

| OPERATION | APPROVE |
|-----------|---------|
| ± 0.25 | |
| ± 0.15 | |
| ± 0.10 | |
| ± 3' | |

| OPERATION | APPROVE |
|-----------|---------|
| ± 0.25 | |
| ± 0.15 | |
| ± 0.10 | |
| ± 3' | |

| OPERATION | APPROVE |
|-----------|---------|
| ± 0.25 | |
| ± 0.15 | |
| ± 0.10 | |
| ± 3' | |

| OPERATION | APPROVE |
|-----------|---------|
| ± 0.25 | |
| ± 0.15 | |
| ± 0.10 | |
| ± 3' | |

| OPERATION | APPROVE |
|-----------|---------|
| ± 0.25 | |
| ± 0.15 | |
| ± 0.10 | |
| ± 3' | |

1 2 3 4 5 6 7 8 9 10