


NOTES:
 Current Rating: 1AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PBT + 30%GF (UL94V-0)

Ordering Information

6310-050 S S SX M N A 01

No. of Pins 50Pins
 Contact Plating SA=15u"Gold/Tin
 S5=30u"Gold/Tin
 Packing A=Tray

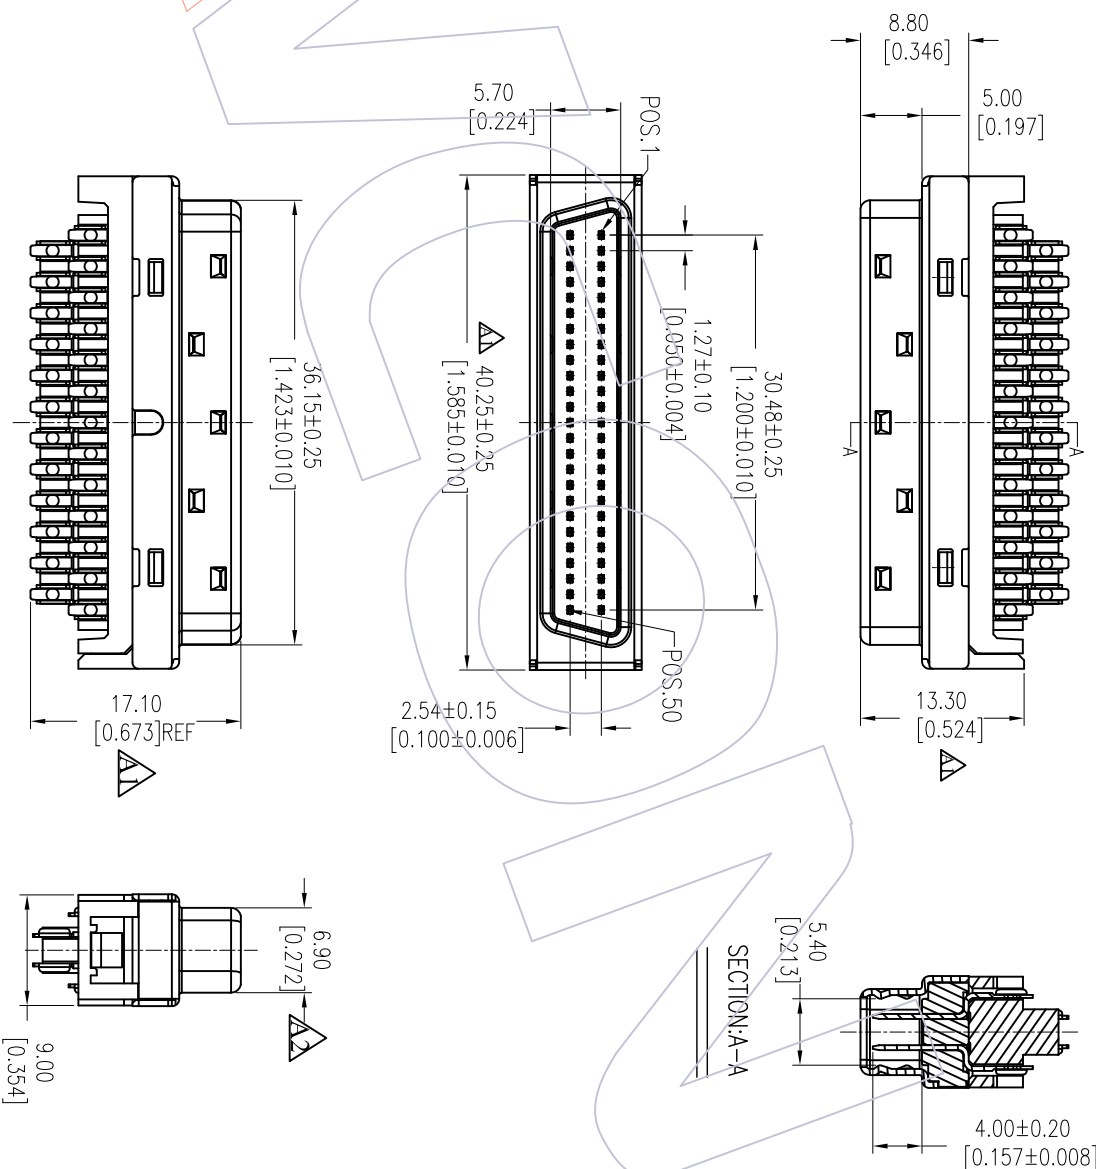

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:		WCON - Dongguan		WCON - Kunshan	
A2	2013/01/26	Modify The Dimension 7.00 → 6.90		XX ±0.40	TsingSn	2013/01/26	mm 1/1	A4	6310-050SSSXMNNA01	1.27x2.54 SCSI 50P Male Soldering Type		Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com		Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com	
A1	2012/04/19	MODIFY		XXX ±0.25	CHECK	DATE	inch	A4							
A0	2012/03/19	NEW		X,XXX ±0.15	APPROVE	DATE	SHEET	1/1							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM	TOL	PROJ.				Customer NO.					



Http: www.wcon.com

WCON - Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON - Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com