

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information


2168T - 2 XX S XX CUNT

No. of Pins per Row: 02-40PIN
 Contact Plating: Au
 G0=Gold Flash
 G3=10μr Gold
 G4=15μr Gold
 G5=30μr Gold
 S0=Gold Flash/Tin
 S3=10μr Gold/Tin
 S4=15μr Gold/Tin
 S5=30μr Gold/Tin
 SN=Tin
 SM=Matte Tin


Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

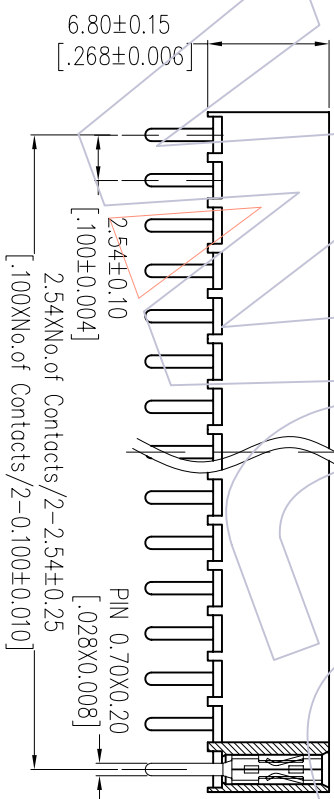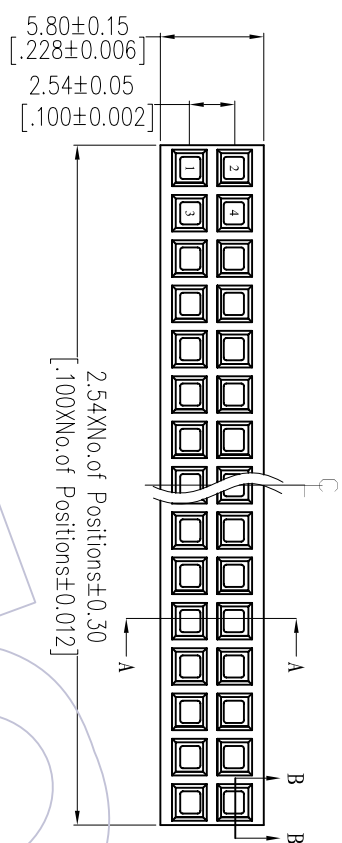

SECTION: B-B

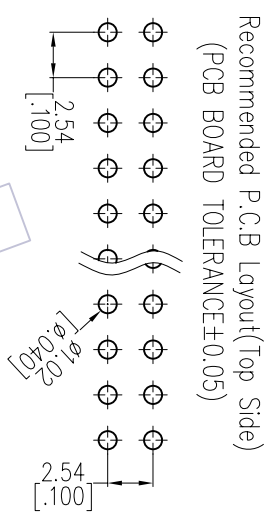

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)



SECTION: A-A

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX		JYHuog		2012/08/10		mm				2168T-2XXSXXCUNT1	
X.XX		CHECK		DATE		UNIT		A4		TITLE:	
X.XXX		±0.25				mm		1/1		FH2.54 DUAL ROW 180° DIP	
Angle		±0.15		DATE		SHEET		1/1		H=6, 8 TOP ENTER	
DIM		± 3°		DATE		PROU.		1/1		Customer NO.	
CHANGE		APPROVE		DATE		PROU.		1/1		Customer NO.	
MODIFICATION DESCRIPTION		APPROVE		DATE		PROU.		1/1		Customer NO.	
NEW		APPROVE		DATE		PROU.		1/1		Customer NO.	
DATE		APPROVE		DATE		PROU.		1/1		Customer NO.	
2012/08/10		APPROVE		DATE		PROU.		1/1		Customer NO.	
REV		APPROVE		DATE		PROU.		1/1		Customer NO.	
A0		APPROVE		DATE		PROU.		1/1		Customer NO.	

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com