

HSP

NOTES:



Rated Current:9.0AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:1500V AC/minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to +85℃

Contact Material:Brass
 Contact Plating:Au Or Sn Over Ni
 Insulator Material:PA66 Or PA46

Ordering Information

WF4202-2 WS XX W A 1

Neof Row 01-12P
 Neof plus Contact Plating
 S0=Gold Flash/Tin B=Black
 S1=5μ Gold/Tin W=White
 S2=30μ Gold/Tin
 S3=10μ Gold
 S4=5μ Gold/Tin
 S5=30μ Gold/Tin
 S6=Gold Flash
 G3=10μ Gold
 G4=5μ Gold
 G5=30μ Gold
 Blank=Tin
 H=PA46
 Blank=PA66

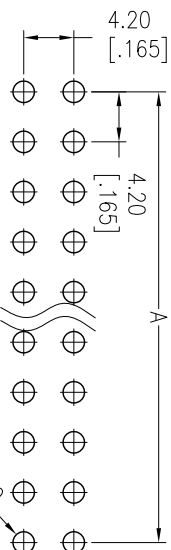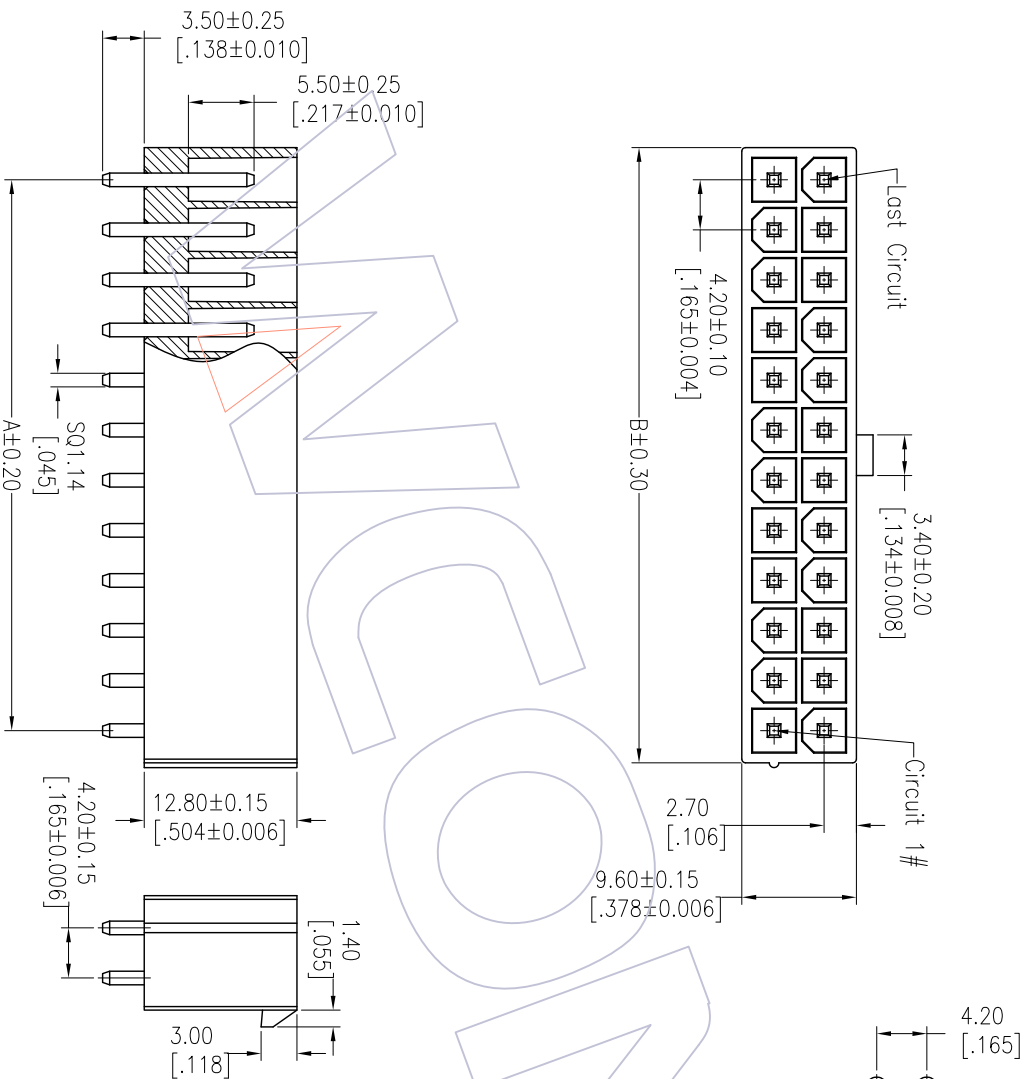

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimensional & Ordering Information

Circuit	Part No.	Dimension		Pcs /Troy
		A	B	
2x01	WF4202-2WS01WA1	---	5.40	450
2x02	WF4202-2WS02WA1	4.20	9.60	260
2x03	WF4202-2WS03WA1	8.40	13.80	180
2x04	WF4202-2WS04WA1	12.60	18.00	140
2x05	WF4202-2WS05WA1	16.80	22.20	110
2x06	WF4202-2WS06WA1	21.00	26.40	100
2x07	WF4202-2WS07WA1	25.20	30.60	80
2x08	WF4202-2WS08WA1	29.40	34.80	70
2x09	WF4202-2WS09WA1	33.60	39.00	60
2x10	WF4202-2WS10WA1	37.80	43.20	60
2x11	WF4202-2WS11WA1	42.00	47.40	50
2x12	WF4202-2WS12WA1	46.20	51.60	50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW		DATE		SCALE		FIT		PART NO.
				XX	±0.40	JYHuang	12/09/19	UNIT	mm	SIZE	A4			
A0	12/09/19	NEW		X.XX	±0.25	CHECK								WF4202-2WSXXWA1
				X.XXX	±0.15									4.20 MINI FIT DIAL ROW 180°
				Angle	± 3'	APPROVE								WITHOUT POST
				DIM	TOL									Customer NO.

WCON

Http: www.wcon-china.com

WCON-Dongguan WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57469408

Fax: +86 769 85358915 Fax: +86 512 57469469

E-mail: sales@wcon-china.com E-mail: wconks@wcon-china.com