





**NOTES:**

Rated Current: 0.75AMP  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0 BK




Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

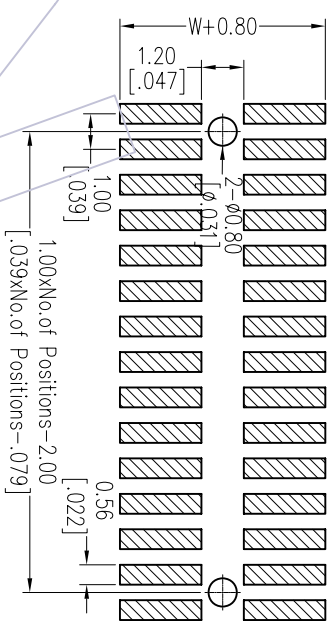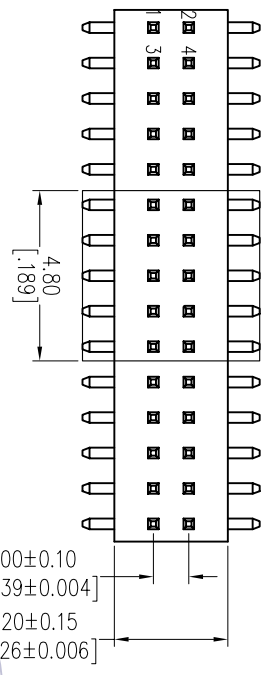

**Ordering Information**

1522-12 XX XX M 062 X X

No. of Pins Contact Plating Pin Length Series No.  
 Per Row: 01-50 G0=Gold Flash L=B+D+2.2; M:LD 1=Type 1  
 G3=10u"Gold Standard: 062=6.2 2=Type 2  
 G4=15u"Gold .....  
 G5=30u"Gold  
 Packing  
 T=Tube  
 P=Tube+CAP  
 R=Tube&Reel+CAP

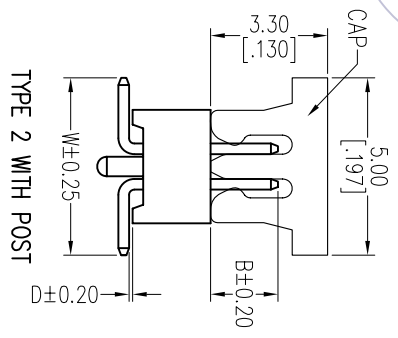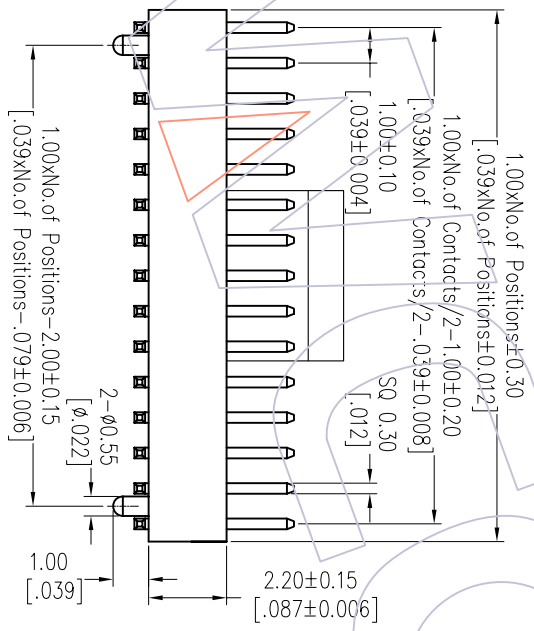

Item	Pin Length	W	D	B
Standard	6.20	5.00	0.10	1.90
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A1	2012/11/21	Modify the material	-----	XX	JYHuang	2012.11.21	UNIT	mm	1522-12XXXXMXXXXX	PHI. 00 DUAL ROW SMT H=2.2		Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2012/03/01	NEW	-----	XX	CHECK	DATE	SIZE	A4				Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	1/1				E-mail: sales@wcon.com	E-mail: sales@wcon.com
			DIM	± 3'	PROJ.								



Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com