
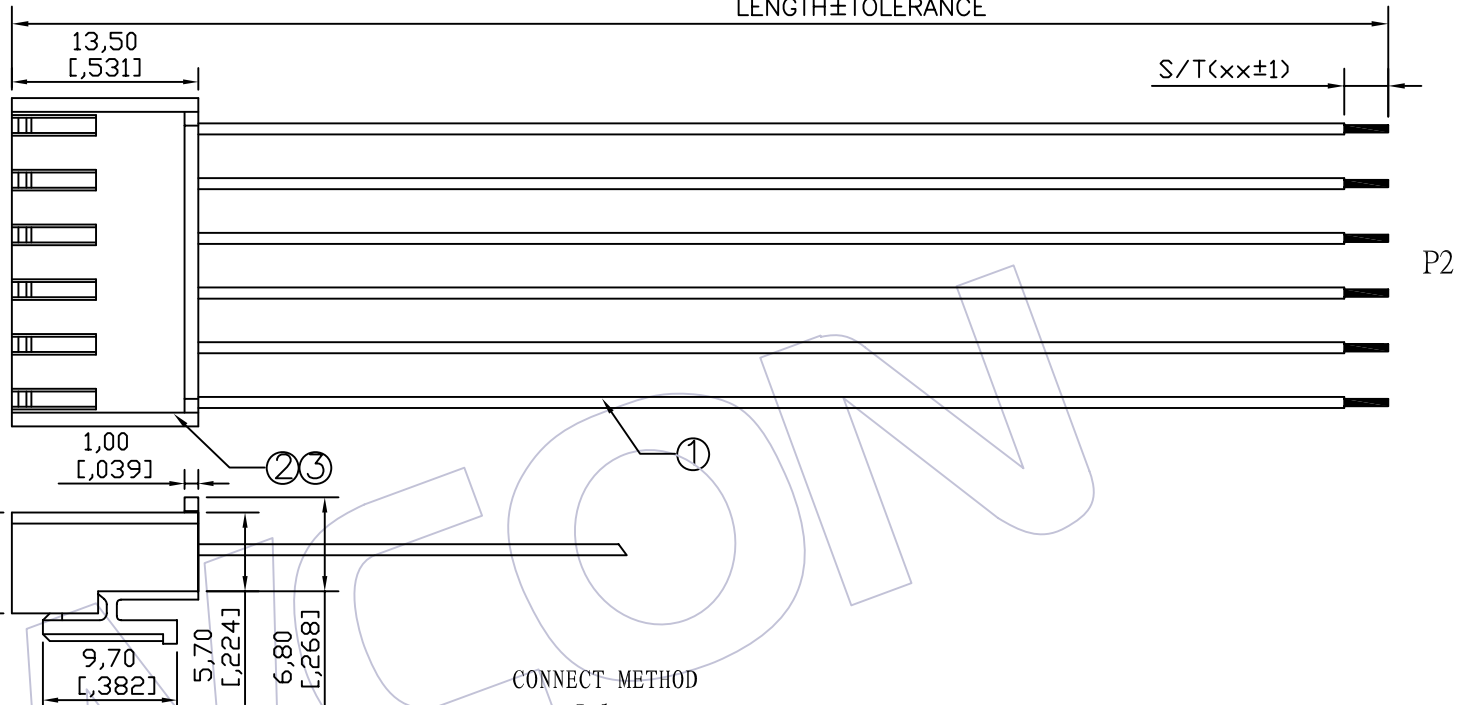


HSF

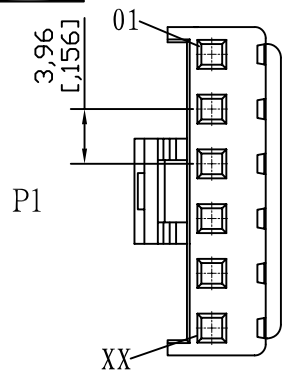

SPECIFICATIONS

Insulation Resistance: 5MΩ Min
 Contact Resistance: 3.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CONNECT METHOD

	P1 Color	P2
01	XXX	OPEN
02	XXX	OPEN
03	XXX	OPEN
XX	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 18~22AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

Ordering Information

C9150 - xx 01 xxx 101

No.of Pins:
02~20P

Shape Style:
01=one end Process,
another one end plate tin

Length of Line

NO.	PART NO.	NAME	Specification	Q'TY	UNIT
③	WF3963-TBSN01	Terminal	VH 3.96mm Brass Tin Terminal	xx	PCS
②	WF3963-HxxW01	Housing	VH 3.96mm xxP WHITE Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL:xxxx,AWG:18~22,Color:xx,Wire	xxxx	MM

工程图 ENGINEERING	绘图 DRAW	BEN	09/10/22	SCALE	FREE	维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD
X.X	±0.30			UNIT	mm	
X.XX	±0.20			SIZE	A4	
X.XXX	±0.10			SHEET	1/1	
Angle	± 2'			PROJ.	客户料号Customer NO.	
DIM	TOL	核准 APPROVE				料号 PART NO. C9150-xx01xxx101
						品名 TITLE: PH3.96 **P Housing TO OPEN

版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE
AO	09/10/22	NEW		